


GET-1008xx Installation Sheet

Connections:

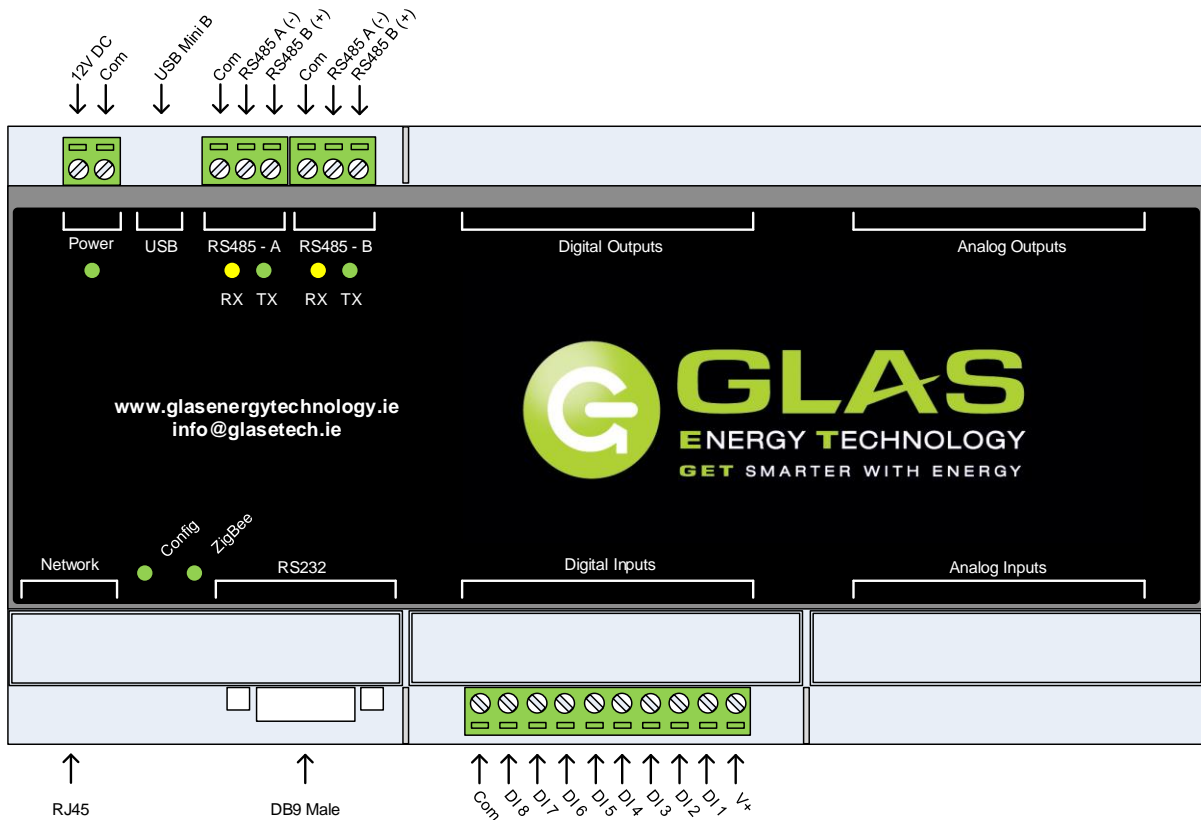

RS232 connector: 2 – RxD, 3 – TxD, 5 – Gnd, 7 – RTS, 8 – CTS, all others no connection

Specifications:

Dimensions:	213mm x 110mm x 33mm
Mounting:	DIN rail mounting or wall mounting via integral slots on base.
EMC Immunity:	EN6100-4-2 (ESD), EN6100-4-3 (Radiated Immunity), EN6100-4-4 (EFT), EN6100-4-6 (Conducted Immunity). Additional shielding or filtering may be required for heavy industrial environments. Maximum allowed cable lengths of 10m.
EMC Emissions:	CISPR 22 Class B, FCC Part 15 Class B. Your results may vary, depending on your application, so additional shielding or filtering may be needed to maintain the Class B emission qualification. Maximum allowed cable lengths of 10m.
Power Supply:	12Vdc, 300mA
Fuse:	1000mA resettable.
Operating Environment:	0°-50°C, Maximum Relative Humidity 70%
The GET-1008xx is CE qualified.	

For more information please contact:

GLAS Energy Technology,
Johnstown Business Centre,
Johnstown House,
Johnstown,
Naas, Co. Kildare,
Ireland
+353 (0) 818 227050
www.glasenergytechnology.ie
info@glasetech.ie